

数 量 総 括 表						
工 種	種 別	細 別	規 格	単 位	数 量	備 考
土 工						
	床 堀	小規模		m ³	90.0	
	埋 戻 し	小規模		m ³	90.0	
	不 足 土	砂		m ³	4.0	
体育施設工						
	バックネット(1)	6000+1000		m	16.0	
	バックネット(2)	4000+1000		m	16.0	
	フェンス(1)	H3000		m	33.0	
	フェンス(2)	H1200		m	36.0	
雑 工						
	既存バックネット 撤去(1)	6000+1000		m	16.0	
	既存バックネット 撤去(2)	4000+1000		m	16.0	
	既存バックネット 基礎取壊し(1)			m3	12.0	
	既存バックネット 基礎取壊し(2)			m3	7.0	
	既存縁石撤去(1)			m	21.0	
	既存縁石撤去(2)			m	15.0	
	既存コンクリート 破砕	t=7cm		m2	1.0	
	コンクリート殻 処分	L=7.6km		m3	20.0	
	コンクリート切断	t=7cm		m	5.0	
	既存樹木伐採	樹高4.0 幹回り1.0		本	3.0	
	伐採木処分			t	1.2	
	スクラップ			t	0.2	参考値
技術管理費						
	平板載荷試験	50KN以内		箇所	2.0	

数 量 計 算 書				
名 称	材 料	計 算 式	数 量	単位
		延長調書 (土 工)		
床 堀		数量計算書より 20.2+15.2+34.0+16.9	90.0	m ³
埋 戻 し		〃 21.8+16.4+33.8+17.8	90.0	〃
不 足 土	砂	〃 1.7+1.2+0.9-0.2	4.0	〃
		延長調書 (体育施設工)		
バックネット(1)	6000+1000	計画図(1)より	16.0	m
バックネット(2)	4000+1000	計画図(2)より	16.0	〃
フェンス(1)	H3000	計画図(1)より 16.55+16.0	33.0	〃
フェンス(2)	H1200	〃 36	36.0	〃
		延長調書 (雑 工)		
既存バックネット 撤去(1)	6000+1000	撤去図より	16.0	m
既存バックネット 撤去(2)	4000+1000	〃	16.0	〃
既存バックネット 基礎取壊し(1)		〃	12.0	m3
既存バックネット 基礎取壊し(2)		0.6×1.1×1.1×9	7.0	〃
既存縁石撤去(1)		〃	21.0	m
既存縁石撤去(2)		74×0.2	15.0	〃
既存コンクリート 破砕	t=7cm	〃	1.0	m ²
コンクリート殻 処分	L=7.6km	12.3+6.5+20.8×0.1×0.1+ 0.05×0.05×π×74+1.4×0.07	20.0	m3
コンクリート切断	t=7cm	撤去図より	5.0	m
	樹高4.0 幹回り1.0		3.0	本
伐採木運搬		樹木半径R=1.0/π/2=0.16 0.16×0.16×π×4×3=0.97	1.0	m3
伐採木処分		1.0×1.2t/m3=1.2t	1.2	t
スクラップ		95kg+130kg ※参考値	0.2	t
		延長調書 (技術管理費)		
平板載荷試験	50KN以内		2.0	箇所

数 量 計 算 書

Technical drawing of a metal frame structure, likely a shelving unit or partition. The drawing shows a side elevation with dimensions and material specifications.

Dimensions:

- Overall width: 2000 mm (split into two 1000 mm sections).
- Overall height: 2000 mm (split into 1500 mm and 500 mm sections).
- Top section height: 2950 mm.
- Bottom section height: 700 mm.
- Base height: 150 mm.
- Base width: 450 mm (inner) and 550 mm (outer).

Material Specifications:

- Top rail: $\phi 38.1 \times 1.6$
- Vertical posts: $\phi 4.0$
- Horizontal rails: $\phi 38.1 \times 1.6$ (水抜穴付) (with drainage holes)
- Mesh: 完全式菱形金網 $\phi 2.6 \times 50\text{mm}$ (スプリングネット) (Complete diamond mesh $\phi 2.6 \times 50\text{mm}$ (Spring Net))
(亜鉛・アルミ・マグネシウム合金めっきハガネ鉄線) (Zinc-Aluminum-Magnesium alloy plated steel wire)
(素線抗張力 850N/mm²~1050N/mm²) (Base wire tensile strength 850N/mm²~1050N/mm²)
- Base reinforcement: [STK500] $\phi 60.5 \times 3.2$ (補強入り) (Reinforcement included)
- Base reinforcement: [STK500] $\phi 60.5 \times 3.2$ (補強入り) (Reinforcement included)
- Base reinforcement: 21-40-8
- Base reinforcement: RC-40

Other Notes:

- Ground level: $\nabla \text{GL}+0\text{m}$
- Base width: 450 mm and 550 mm

[illegible]

Technical drawing of a rectangular structure, likely a foundation or retaining wall, showing dimensions and material specifications.

Dimensions:

- Overall width: 2000
- Overall height: 1200
- Internal height: 1150
- Base width: 500
- Base height: 100
- Base offset: 250 (inner), 350 (outer)

Material Specifications:

- Top horizontal reinforcement: $\phi 38.1 \times 1.6$
- Bottom horizontal reinforcement: $\phi 38.1 \times 1.6$ (水抜穴付)
- Vertical reinforcement: $\phi 4.0$
- Diagonal reinforcement: $\phi 50.8 \times 1.6$
- Reinforcement mesh: 完全式菱形金網 $\phi 2.6 \times 56\text{mm}$ [スプリングネット]
- Reinforcement material: [亜鉛・アルミ・マグネシウム合金めっきハガネ鉄線]
- Reinforcement strength: (素線抗張力 $850\text{N}/\text{mm}^2 \sim 1050\text{N}/\text{mm}^2$)

Other Details:

- Ground level: $\nabla \text{GL}+0\text{m}$
- Reinforcement spacing: 21-20-8
- Reinforcement diameter: $\phi 40$

数 量 計 算 書				
名 称	材 料	計 算 式	数 量	単位
		フェンス(2) H1200 10m当り		
基礎材	再生クラッシャーラン t=10cm	1箇所当り $A=0.35 \times 0.35 = 0.12\text{m}^2$		
		10/2=5.0箇所	0.60	m ²
基礎型枠	小型	$0.5 \times 0.25 \times 4 \times 5$	2.50	m ²
基礎コンクリート	21-20-8	$0.5 \times 0.25 \times 0.25 \times 5.0$	0.20	m ³
フェンス	H=1200	10.00	10.00	m
設置工			10.00	m

数 量 計 算 書

[illegible]

数量計算書

2000 2000

A B

$\phi 38.1 \times 1.6$

$\phi 38.1 \times 1.6$ (水抜穴付)

$\phi 38.1 \times 1.6$

完全式菱形金網 $\phi 2.6 \times 50\text{mm}$
(スプリングネット)
(亜鉛・アルミ・マグネシウム合金めっきハガネ鉄線)
素線抗張力 $850\text{N}/\text{mm}^2 \sim 1050\text{N}/\text{mm}^2$

$\phi 38.1 \times 1.6$ (水抜穴付)

$\phi 4.0$

2050

10

4160

2050

50

500

1.100

200

100 600 1100 800

21-40-8

RC-40

700

700

1.100 1.300

970 930 20

45°

410

200

1100

$\phi 60.5 \times 2.3$

1100

900

700


400

引抜け防止 BN M8

引抜け防止 BN M8

[illegible]

数量計算書

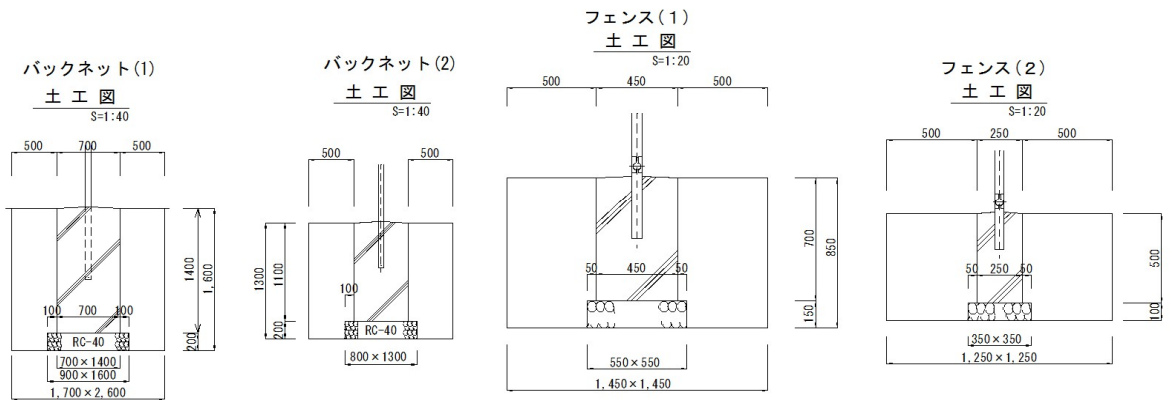

数量計算書

名称	材料	計算式	数量	単位
		バックネット(1) B6000+1000 1式当り		
床掘		※既存基礎あり $0.5 \times 1.6 \times 1.4 \times 2 \times 9$	20.20	m3
埋戻し		$(0.5 \times 1.4 \times 1.4 \times 2 \times 9 + 0.4 \times 0.2 \times 1.4 \times 2 \times 9) / 0.9$	21.80	m3
不足土	砂	21.84-20.16	1.70	m3
		バックネット(2) B4000+1000		
床掘		※既存基礎あり $0.5 \times 1.3 \times 1.3 \times 2 \times 9$	15.20	m3
埋戻し		$(0.5 \times 1.1 \times 1.3 \times 2 \times 9 + 0.4 \times 0.2 \times 1.3 \times 2 \times 9) / 0.9$	16.40	m3
不足土	砂	16.38-15.21	1.20	m3
		フェンス(1)H3000		
床掘		※基礎数19個 $1.45 \times 1.45 \times 0.85 \times 19$	34.00	m3
埋戻し		$(33.96 - (0.55 \times 0.55 \times 0.15 + 0.45 \times 0.45 \times 0.7) \times 19) / 0.9$	33.80	m3
残土運搬		33.96-33.78	0.20	m3
		フェンス(1)H1200		
床掘		※基礎数18個 $1.25 \times 1.25 \times 0.60 \times 18$	16.90	m3
埋戻し		$(16.88 - (0.35 \times 0.35 \times 0.15 + 0.25 \times 0.25 \times 0.5) \times 18) / 0.9$	17.80	m3
不足土	砂	16.88-17.76	0.90	m3